

# Helvar

**EN** Quick Start Guide (Page 3)

**FI** Pikaopas (Sivu 16)

**SE** Quick Start Guide (Sida 29)

**PL** Instrukcja obsługi (Str. 42)



EN

Helvar Ltd,

FI

Hawley Mill, Hawley Road, Dartford. DA2 7SY. UK

SE

[www.helvar.com](http://www.helvar.com)

+44 (0) 1322 617200

PL

HC Center Sp. z o.o. Sp.k.

ul. Anny German 15, 01-794 Warszawa

[www.helvar.pl](http://www.helvar.pl)

[info@helvar.pl](mailto:info@helvar.pl)


+48 790 405 973




Thank you for purchasing RoomSet.


Please follow this guide on how to use the app:

If not already loaded onto your tablet, go to Google Play Store and install the RoomSet app.




Upon opening the app you will be introduced to a blank homescreen.

To initiate a room set up select the  icon located at the bottom right of the screen.




The RoomSet app will automatically search for room controllers (lighting sensors) within range.



Select a controller displayed onscreen and the corresponding physical unit will start to flash.

With the correct sensor selected, press 'NEXT'.

Complete the room details and select 'NEXT'.




Scroll and choose the most suitable layout and 'FINISH'

**Note:** The layout can be adjusted later in the process.

Each unit will be displayed in a panel on the right hand side of the room layout.


Selecting an individual onscreen icon will make the corresponding physical unit flash. Please note that the flashing process is not applicable for the mini input unit (444).

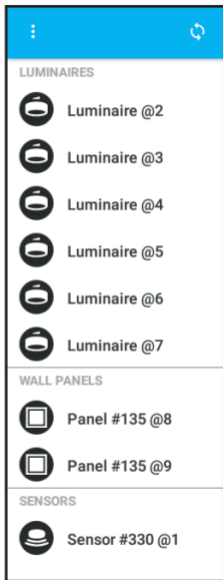


Identify a unit  
then drag and  
drop the icon  
into place on the  
room layout.



Continue until  
the room set up  
is complete.

**Note:** Selecting  
the  icon  
restarts the  
entire layout  
process.

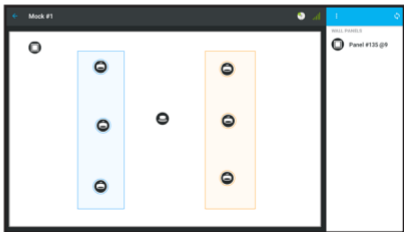

Panel switches are defaulted to control an entire room however they can be allocated to a specific group of lights. To do this select a panel icon (it will turn green), a new display will appear to the right of the screen, choose the down arrow from 'GROUPED WITH'.

A pop up screen will show the light grouping options, select one and the panel icon will display that colour.

Select  to save.

*Please continue for further RoomSet instructions on how to complete a more detailed set up.*



1 ^

2 v

3 □

4 ○

DEVICE NAME

Panel #135 @8

13 / 32

GROUPED WITH

Broadcast to room ▾

Blue

Orange

INFRARED

The next section of this booklet explains how to complete the following:


- *Device Settings*
  - *Luminaire* (Page 9)
  - *Sensor* (Page 10)
  - *Modular Panel* (Page 11)
- *Duplicate Layouts* (Page 13)
- *Deleting Layouts* (Page 14)
- *Firmware Updates* (Page 15)



## Device Settings

Selecting an icon within the onscreen room layout will turn it green and the information panel on the right hand side of the app will display the following information:

### Luminaire

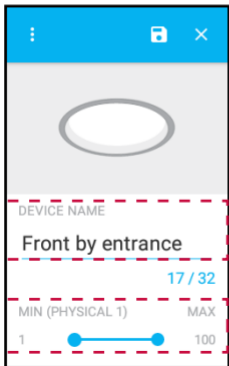

i) Allows user to give luminaire specific identification.


ii) Sets minimum and maximum brightness of individual luminaire.

Select  to save.



## Sensor

- i) Allows user to name sensor.
- ii) For mapping the sensor to a specific group of lights or the entire room.
- iii) Sets how long the lights stay on in the current setting prior to fading to a lower level if no movement is detected.
- iv) This safety feature specifies how long lights stay at low level prior to turning off.
- v) Sets a time period where the sensor does not automatically switch the lights on if they are turned off via the panel switch.

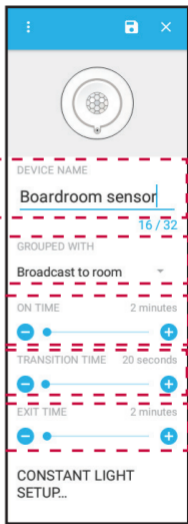

Select  to save.




## Modular Panel

**Note:** Switch panel shown is part of a product package, other Helvar panels can be used.

- i) Allows user to name switch panel.
- ii) The user can allocate the panel to a specific group of lights.
- iii) Adjusts the fade up/down time for the lights.
- iv) To enable/disable infrared usage.


Select  to save.

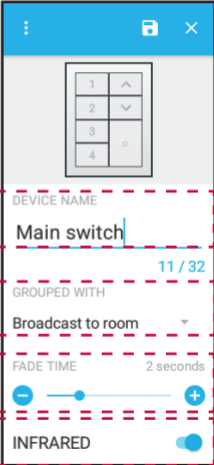

The screenshot displays a configuration window for a switch panel. At the top, there is a blue header with a menu icon, a save icon, and a close icon. Below the header is a preview of the physical switch panel, which has four buttons labeled 1, 2, 3, and 4, along with up and down arrow buttons and a small circle. The main configuration area is divided into four sections, each enclosed in a red dashed box and labeled with Roman numerals:


- i)** **DEVICE NAME**: A text input field containing "Main switch".
- ii)** **GROUPED WITH**: A dropdown menu showing "Broadcast to room".
- iii)** **FADE TIME**: A slider control set to "2 seconds".
- iv)** **INFRARED**: A toggle switch that is currently turned on.

RoomSet comes with preset lighting levels however these can easily be modified so the end user can store their own room lighting scenes for scenarios such as presentations, grouping certain lights or simply for energy/cost saving.

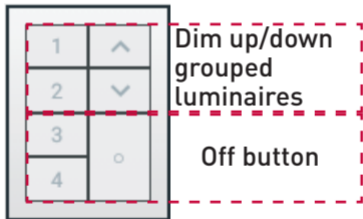


Select a numbered button from the onscreen panel and the end user can adjust lighting groups and/or luminaires to suit their requirements.

## Duplicate Layouts



On the home screen of the app select the drop down menu (⋮) from the room that is going to be copied.



Choose the 'Duplicate' option, enter the new room name and 'FINISH'.



The duplicated room will be displayed on the home screen. Select the new room and press 'Search for Room Controller' to initiate the RoomSet process.


## Deleting Layouts

From the home screen of the app, select the drop down menu (☰) of the room that is going to be deleted.





A new pop up appears, select the 'Delete Room' option.

Choose 'DELETE' from the confirmation pop up and the room will be permanently removed from the app.



## Firmware Updates



If  is on the home page of the app, as shown left, firmware updates may be required.

Select the correct room, a message will appear asking if you wish to continue with the firmware update, select 'UPDATE' and the process will automatically initiate.

***Note:*** *If the app is not within range of the correct sensor an error message will appear. Repeat the search process once within range.*

When the firmware update has been completed a message will appear onscreen, as shown right. Return to the home screen and the yellow icon will no longer be displayed.

